


Lot-5

Evaluation Criteria for Procurement of Installation of Power Cable for different Electrical Works

Mandatory Documents	<ul style="list-style-type: none"> i. ATL ii. NTN Registration iii. GST Registration iv. Last year Income Tax Return. v. Last year Sales tax Return. vi. Latest three years Bank statement. vii. Affidavit on stamp papers duly attested regarding black listing other condition as per specimen on page-45 viii. Certificate that 2% CDR is attached with Financial bid. ix. PEC Code EE-04-05 	Bids without Mandatory documents shall not consider for evaluation.														
S. No.	Parameters	Detail / Supporting Documents	Total Marks	Remarks												
1	Past performance (Last one year) as per signed Bid form 4	Major institution served: <table border="1" style="margin-left: 20px;"> <tr> <td>i.</td> <td>No institution served</td> <td style="text-align: center;">0</td> </tr> <tr> <td>ii.</td> <td>1 to 2</td> <td style="text-align: center;">5</td> </tr> <tr> <td>iii.</td> <td>3 to 5</td> <td style="text-align: center;">10</td> </tr> <tr> <td>iv.</td> <td>More than 5</td> <td style="text-align: center;">15</td> </tr> </table>	i.	No institution served	0	ii.	1 to 2	5	iii.	3 to 5	10	iv.	More than 5	15	15	Institutions include Government departments and Private hospitals of 50 or more beds and registered with HRA KPK or Equivalent Registering Body.
i.	No institution served	0														
ii.	1 to 2	5														
iii.	3 to 5	10														
iv.	More than 5	15														
2	Market experience in quoted items	<table border="1" style="margin-left: 20px;"> <tr> <td>i.</td> <td>1 to 3 years</td> <td style="text-align: center;">5</td> </tr> <tr> <td>ii.</td> <td>4 years or more</td> <td style="text-align: center;">10</td> </tr> </table>	i.	1 to 3 years	5	ii.	4 years or more	10	10	As a minimum requirement, during any of the last three years, he must have completed at least One contract involving the supply, of similar Goods and each at least 50% of comparable scale.						
i.	1 to 3 years	5														
ii.	4 years or more	10														
3	Product Sample	Goods samples will be examined & accepted by the Technical & Evaluation Committee as per the following parameters: <ul style="list-style-type: none"> Consistency in quality Durability <table border="1" style="margin-left: 20px;"> <tr> <td>i.</td> <td>Excellent</td> <td style="text-align: center;">15</td> </tr> <tr> <td>ii.</td> <td>Good</td> <td style="text-align: center;">10</td> </tr> <tr> <td>iii.</td> <td>Unsatisfactory</td> <td style="text-align: center;">0</td> </tr> </table>	i.	Excellent	15	ii.	Good	10	iii.	Unsatisfactory	0	15	Product that 100% comply with the advertised specifications will be considered for evaluation. NOTE: Warranty Period One year is Mandatory.			
i.	Excellent	15														
ii.	Good	10														
iii.	Unsatisfactory	0														

Total marks: 40

Qualifying marks: 70% (28) and above. the financial bids of technically accepted bidders will be opened publicly at a time to be announced by the Procuring Agency and the financial bids found technically non-responsive shall be returned un-opened to the respective Bidders. **Lowest priced bid from the technically qualified bidder will be accept**

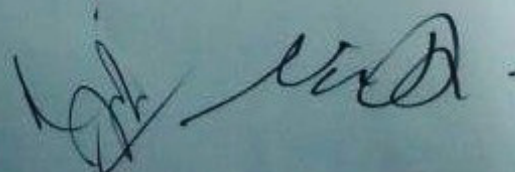

BOQ FOR THE PROVISION OF POWER SUPPLY TO DIFFERENT DB's AT ATH ABBOTTABAD.

S. No	Description.	Qty.	cost.	Total.
01.	Supplying / Laying & Termination of Power Cable 95 mmsq 3.5 Core, PVC/PVC/Cu Un-armored	150 Mtr		
02.	Supplying / Laying & Termination of Power Cable 70 mmsq 3.5 Core, PVC/PVC/Cu Un-armored	150 Mtr		
03.	Supplying / Laying & Termination of Power Cable 50 mmsq 3.5 Core, PVC/PVC/Cu Un-armored	173 Mtr		
04.	Supplying / Fixing of Perforated Cable Tray with cover of size 9"x4" with Iron angle brackets cable ties etc.	25-Mtr		
05.	Supplying / Fixing of Perforated Cable Tray with cover of size 4"x2" with Iron angle brackets cable ties etc.	77-Mtr		
06.	Supplying / Fixing of Perforated Cable Tray with cover of size 3"x2" with Iron angle brackets cable ties etc.	100-Mtr		
07.	Labor charges for laying of 300 mmsq 04 core cable from Ground upto Roof Top in pre-laid Cable Tray using all tools required for safe mounting.	25 Mtr		
08.	Supplying / Fixing of Cable Joint for 300 mmsq 04 Core Cable for Supply to Roof Top DB No. 4	02 Nos.		
09.	Supplying / Laying & Termination of Earth Cable Bare Copper Conductor of 70 mmsq for Body Earth of DB 04 at Roof Top.	30 Mtr		
10.	Supplying / Laying & Termination of Earth Cable Bare Copper Conductor of 35 mmsq for Body Earth of DB 04 at Roof Top.	195 Mtr		
11.	Supply & Fixing of Bus Bar Panel with 600-Amps rated bus bars, 1x250Amps, 2x200 Amps TP MCCBa	01 No		
12.	Supplying / Laying & Termination of Power Cable 120 mmsq Single Core, PVC/PVC/Cu Un-armored	160 Mtr		
13.	Supplying / Laying & Termination of power Cable 04-Core 70 mm Sq Size, Copper Conductor, PVC/PVC/un armored 1000-Volt Pakistan Cable/New Age/Equaling	75-Meter		
14.	Supplying / Fixation Distribution board size 24" x 30"X 12" of 16 SWG MS sheet Powder Coated with magnetic Contactor 160-Amp = 01-No (Schindler/ Equaling), Circuit Breaker 04 Pole, 100-Amp = 01-No, (Schindler/ Equaling), Under Volt / Over Volt Protection Relay including, Volt Meter, Amp. Meter, Indication Lamp, Complete in all respect.	01-Job		


Assistant Director (Civil)


Assistant Engineer (E)

Issued To,

M/S. _____